

## PATENT COOPERATION TREATY

## PCT

## INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference <b>PHNL010209W0</b>	<b>FOR FURTHER ACTION</b> see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. <b>PCT/EP 01/ 04320</b>	International filing date (day/month/year) <b>13/04/2001</b>	(Earliest) Priority Date (day/month/year) <b>27/04/2000</b>
Applicant <b>KONINKLIJKE PHILIPS ELECTRONICS-N.V.</b>		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 2 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

## 1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

**5**

☐ None of the figures.



## INTERNATIONAL SEARCH REPORT

International Application No

EP 01/04320

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 H01J29/70 H01J29/76

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, EPO-Internal, INSPEC, IBM-TDB

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	WO 00 44028 A (KONINKL PHILIPS ELECTRONICS NV) 27 July 2000 (2000-07-27) cited in the application claims 1-5 -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

27 August 2001

Date of mailing of the international search report

31/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Van den Bulcke, E



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

EP 01/04320

Patent document  
cited in search report

Publication  
date

Patent family  
member(s)

Publication  
date

WO 0044028

A

27-07-2000

EP

1066645 A

10-01-2001





## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : <b>H01J 29/76</b>	<b>A2</b>	(11) International Publication Number: <b>WO 00/44028</b>
		(43) International Publication Date: 27 July 2000 (27.07.00)

(21) International Application Number: PCT/EP99/10406


(22) International Filing Date: 24 December 1999 (24.12.99)

(30) Priority Data:  
99200188.3 22 January 1999 (22.01.99) EP(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V.  
[NL/NL];- Groenewoudseweg-1,- NL-5621-BA-Eindhoven  
(NL).(72) Inventors: VINK, Nicolaas, G.; Prof. Holstlaan 6, NL-5656  
AA Eindhoven (NL). VAN ALPHEN, Willem, M.; Prof.  
Holstlaan 6, NL-5656 AA Eindhoven (NL).(74) Agent: BAELE, Ingrid, A., F., M.; Internationaal Octrooibu-  
reau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).(81) Designated States: JP, KR, European patent (AT, BE, CH, CY,  
DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT,  
SE).**Published***Without international search report and to be republished  
upon receipt of that report.*

(54) Title: DEFLECTION UNIT FOR A CATHODE RAY TUBE

## (57) Abstract

The invention relates to a deflection unit (10) for cathode ray tubes in which the external magnetic stray fields are further reduced and the sensitivity of the line deflection coils (17) is increased. This is done by applying a (preferably plastic deformable) magnetic material (56) in the first void spaces (52) between the wire strands (50) of the field deflection coils (18) and/or the second void spaces (54) between the field deflection coils (18) and the yoke ring (22). The plastic deformable magnetic material (56) can be additionally used for adhering the yoke ring (22) to the field deflection coils (18).

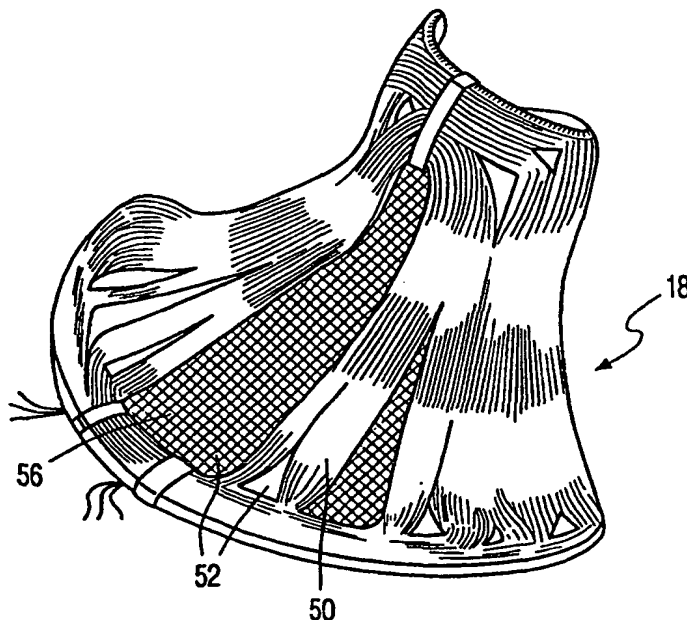

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						



Deflection unit for a cathode ray tube.

The invention relates to a deflection unit for a cathode ray tube, which deflection unit comprises a line deflection coil, a field deflection coil surrounding the line deflection coil, the field deflection coil comprising wire strands and having first void spaces between the wire strands, and a yoke ring surrounding the field deflection coil, second void spaces being present between the field deflection coil and the yoke ring.

The invention also relates to a cathode ray tube comprising such a deflection unit.

The invention further relates to a method of manufacturing a deflection unit for a cathode ray tube.

A deflection unit comprising a field deflection coil and a line deflection coil, in which the field deflection coil comprises wire strands and has void spaces between the wire strands, is known from WO-A 98/26574. A deflection unit of this type is generally constructed in such a way that the two coils are mounted on a hollow support (one on the inner side and one on the outer side) and that a yoke ring surrounds these coils. The purpose of the yoke ring is to short-circuit the magnetic lines of flux outside the coils, which are generated by the field deflection coils during operation. The yoke ring thus reduces unwanted external magnetic stray fields. This also leads to an increase of the sensitivity of the line deflection. Although the presence of a yoke ring helps to reduce these magnetic stray fields, a further reduction is desired.

It is an object of the invention to provide a deflection unit for a cathode ray tube wherein the sensitivity of the line deflection is improved.

The deflection unit according to the invention is characterized in that the first and/or second void spaces are filled with a magnetic material. The application of a magnetic material in the first and/or second void spaces improves the short-circuiting of the magnetic

lines of flux outside the line deflection coils, reduces the unwanted magnetic stray fields and increases the sensitivity of the line deflection.

An embodiment of the invention is characterized in that the magnetic material comprises a plastic deformable magnetic material. The use of a plastic deformable material provides a way of accurately filling the voids and proper adaptation to the local shape of the voids.

A further embodiment of the invention is characterized in that the deformable magnetic material comprises a resinous material, which comprises a filler of magnetic particles. This embodiment has the advantage that the concentration of magnetic particles may be freely chosen and can be optimized to the application.

A further embodiment of the invention is characterized in that the yoke ring is adhered to the field deflection coil by means of the resinous material. This embodiment has the advantage that an additional adhesive necessary for connecting the yoke ring to the field deflection coil is not required; this helps to reduce the cost price of the deflection unit.

A second aspect of the invention provides a cathode ray tube assembly comprising such a deflection unit.

A third aspect of the invention provides a method of manufacturing such a deflection unit as defined in claim 6.

These and other aspects of the invention will be elucidated with reference to the embodiments described hereinafter.

In the drawings,

Fig. 1 shows schematically, partly in a cross-section, partly in a side elevation, a part of a cathode ray tube with an embodiment of the deflection unit according to the invention, and

Fig. 2 is a perspective view of a field deflection coil according to the invention.

In general, like reference numerals identify like elements.

Referring to Fig. 1, the deflection unit 10 is shown mounted on the glass envelope of a cathode ray tube 14 at the region between a neck 11 and a cone portion 12 of the envelope 14. The deflection unit 10 comprises a coil support 15 of generally frusto-conical shape which carries on its inner side, adjacent the envelope surface, a set of two line

(horizontal) deflection coils 17, and on its outer side a set of two field (vertical) deflection coils 18, one of which is shown in Fig. 2, showing in particular first void spaces between the wire strands of the coil.

The coil support 15 together with the sets of deflection coils 17 and 18 secured thereto form a deflection coil assembly. A hollow yoke ring 22, in the shape of a flared annulus conforming generally with the outer contour of the coil assembly, is mounted over the outside of the assembly and fixed thereto. The yoke ring 22 surrounds the coil assembly with its front and rear ends, base, face disposed against an inner portion of the radially-extending part of the coil assembly while its rear, neck, end terminates over an intermediate part of the coil assembly. There are second void spaces 54 between the yoke ring 22 and the field deflection coils 18.

The yoke ring 22 is a sintered molding of soft-magnetic material. The yoke ring 22 serves to short-circuit the magnetic lines of flux outside the coils, which are generated by the field deflection coils during operation. In this way, unwanted external magnetic stray fields are reduced and the sensitivity of the line deflection is increased. Although the presence of the yoke ring 22 helps to reduce these magnetic stray fields, a small external magnetic field still remains and a further reduction of this field is desired.

Fig. 2 is a perspective view of a field deflection coil 18 to be used in the deflection unit as shown in Fig. 1. The field deflection coil 18 comprises wire strands 50 and has first void spaces 52 between the wire strands 50.

The first and second void spaces 52, 54 are filled with a magnetic material 56. The magnetic material 56 serves to further short-circuit the remnant magnetic flux lines and thus a reduction of the external magnetic stray fields is obtained.

By filling the first and second void spaces 52, 54, the magnetic volume of the line deflection field is reduced, leading to a smaller value of the so-called magnetic blind energy  $LI^2$  (L being the inductance of the coil, and I being the current flowing through the coil) and hence to a higher sensitivity of the line deflection. The sensitivity of the line deflection coil 17 can be increased by 5 to 10%. Preferably, a magnetic material 56 having a value for the relative magnetic permeability  $\mu_r \geq 10$  is chosen. In practice, a value of  $\mu_r$  between 10 and 15 was realized.

Appropriate methods of filling the voids are injection molding and insertion molding. In the case of injection molding, a material is caused to flow out of a nozzle into the voids after application of a pressure to a reservoir containing the material. By applying a subsequent heating or a drying step, the material is made immobile in the voids. Another

filling method is provided by insertion molding. In the case of insertion molding, the object to be filled is surrounded by a dedicated mold, whereafter the voids are filled with the material under a relatively high pressure. In this way, a good degree of filling the voids is obtained.

Good results were obtained with a plastic deformable magnetic material, comprising a resinous material, which contains a filler of magnetic particles, such as plasto-ferrite. The plastic deformability of the material results in a good accommodation to the local shape of the void spaces.

Additionally, the resinous material can be advantageously used for adhering the yoke ring 22 to the field deflection coils 18. This further improves the functionality of the yoke ring 22.

In summary, the invention relates to a deflection unit 10 for cathode ray tubes in which the external magnetic stray fields are further reduced and the sensitivity of the line deflection coils 17 is increased. This is done by applying a (preferably plastic deformable) magnetic material 56 in the first void spaces 52 between the wire strands 50 of the field deflection coils 18 and/or the second void spaces 54 between the field deflection coils 18 and the yoke ring 22. The plastic deformable magnetic material 56 can be additionally used for adhering the yoke ring 22 to the field deflection coils 18.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of elements or steps other than those listed in a claim.

## CLAIMS:

1. A deflection unit (10) for a cathode ray tube (14), the deflection unit (10) comprising:

a line deflection coil (17),

~~a field deflection coil (18) surrounding the line deflection coil (17),~~

5 the field deflection coil (18) comprising wire strands (50) and having first void spaces (52) between the wire strands (50), and

a yoke ring (22) surrounding the field deflection coil (18),

second void spaces (54) being present between the field deflection coil (18) and the yoke ring (22),

10 characterized in that

the first and/or second void spaces (52, 54) are filled with a magnetic material (56).

2. A deflection unit (10) for a cathode ray tube (14) as claimed in to claim 1, characterized in that

15 the magnetic material (56) comprises a plastic deformable magnetic material (56).

3. A deflection unit (10) for a cathode ray tube (14) as claimed in claim 2, wherein the deformable magnetic material (56) comprises a resinous material, which comprises a filler of magnetic particles.

20

4. A deflection unit (10) for a cathode ray tube (14) as claimed in claim 3, characterized in that

the yoke ring (22) is adhered to the field deflection coil (18) by means of the resinous material (56).

25

5. A cathode ray tube assembly (10,14) comprising a deflection unit (10) as claimed in claim 1.

6. A method of manufacturing a deflection unit (10) for a cathode ray tube, comprising the steps of :  
producing a line deflection coil (17),  
mounting a field deflection coil (18) around the line deflection coil (17), the field deflection  
5 coil (18) comprising wire strands (50) and having first void spaces (52) between the wire  
strands (50), and  
mounting a yoke ring (22) around the field deflection coil (18), the assembly having second  
void spaces (54) between the field deflection coil (18) and the yoke ring (22),  
characterized in that  
10 the first and/or second void spaces (52, 54) are filled with a magnetic material (56).
7. A method of manufacturing a deflection unit (10) as claimed in claim 6,  
characterized in that the filling step comprises injection molding of the magnetic material (56)  
in the first and/or second void spaces (52,54).
- 15 8. A method of manufacturing a deflection unit (10) for a cathode ray tube as  
claimed in claim 6, characterized in that the filling step comprises insertion molding of the  
magnetic material (56) in the first and/or second void spaces (52,54).

1/1

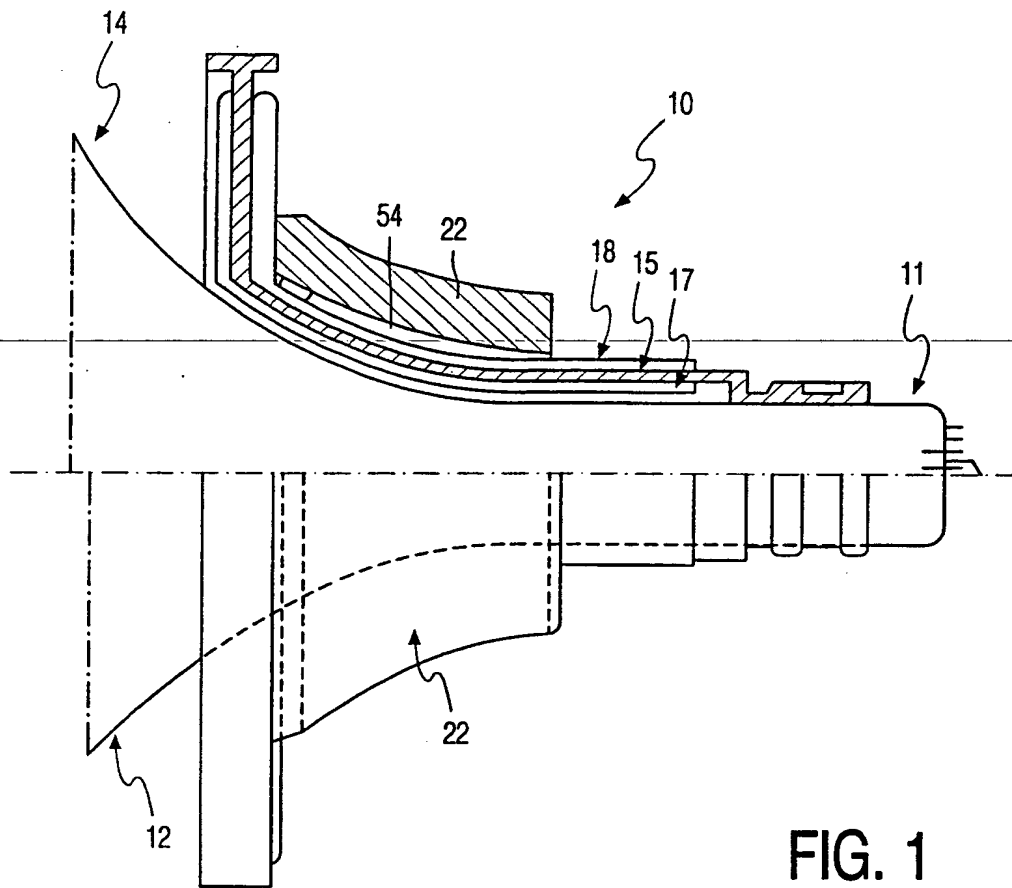


FIG. 1

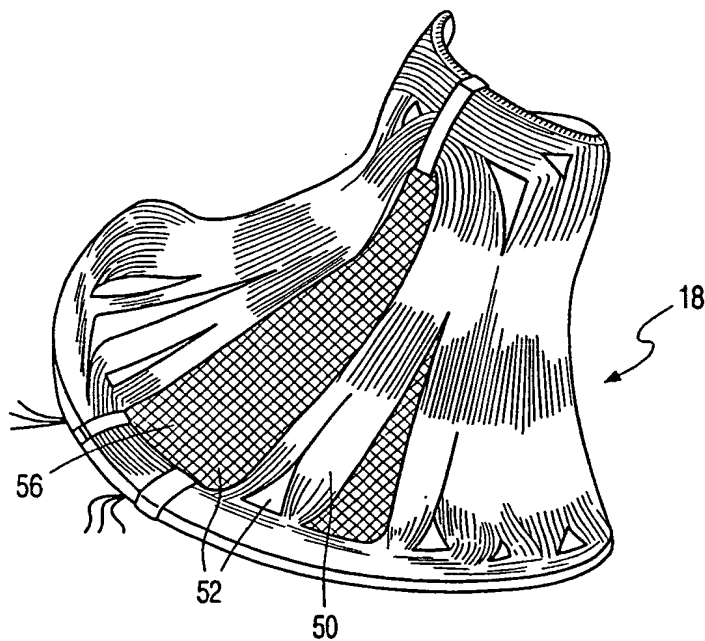


FIG. 2





1/1

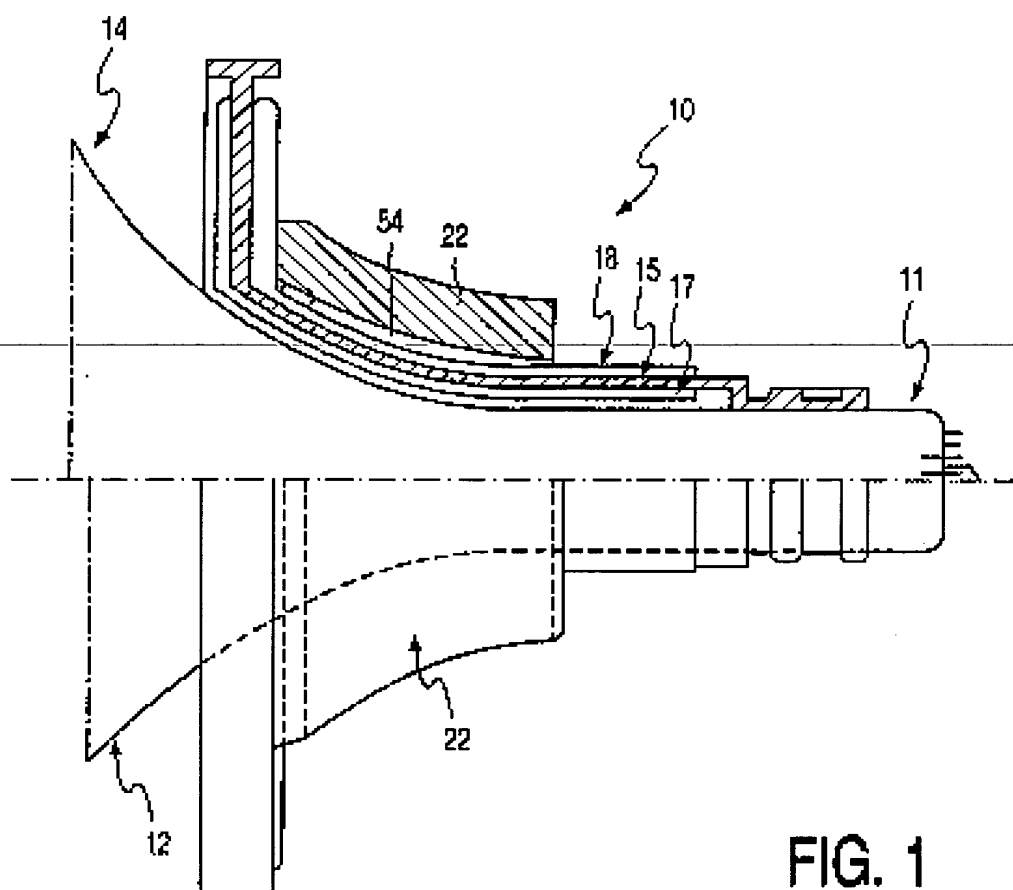


FIG. 1

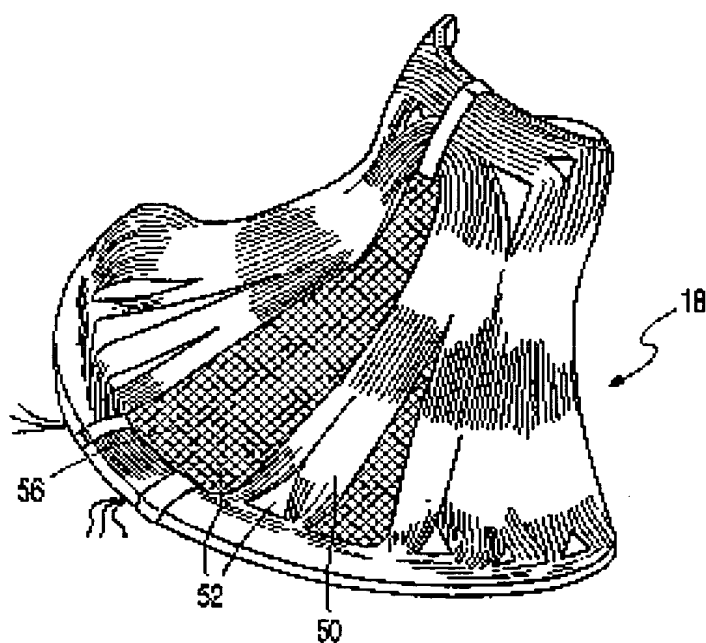


FIG. 2






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>H01J 29/76</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 00/44028</b> <b>(43) International Publication Date:</b> 27 July 2000 (27.07.00)
<b>(21) International Application Number:</b> PCT/EP99/10406 <b>(22) International Filing Date:</b> 24 December 1999 (24.12.99)  <b>(30) Priority Data:</b> 99200188.3                      22 January 1999 (22.01.99)                      EP  <b>(71) Applicant:</b> KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621-BA Eindhoven (NL).  <b>(72) Inventors:</b> VINK, Nicolaas, G.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). VAN ALPHEN, Willem, M.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).  <b>(74) Agent:</b> BAELE, Ingrid, A., F., M.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).		<b>(81) Designated States:</b> JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>  <b>(88) Date of publication of the international search report:</b> 9 November 2000 (09.11.00)

**(54) Title:** DEFLECTION UNIT FOR A CATHODE RAY TUBE

**(57) Abstract**

The invention relates to a deflection unit (10) for cathode ray tubes in which the external magnetic stray fields are further reduced and the sensitivity of the line deflection coils (17) is increased. This is done by applying a (preferably plastic deformable) magnetic material (56) in the first void spaces (52) between the wire strands (50) of the field deflection coils (18) and/or the second void spaces (54) between the field deflection coils (18) and the yoke ring (22). The plastic deformable magnetic material (56) can be additionally used for adhering the yoke ring (22) to the field deflection coils (18).

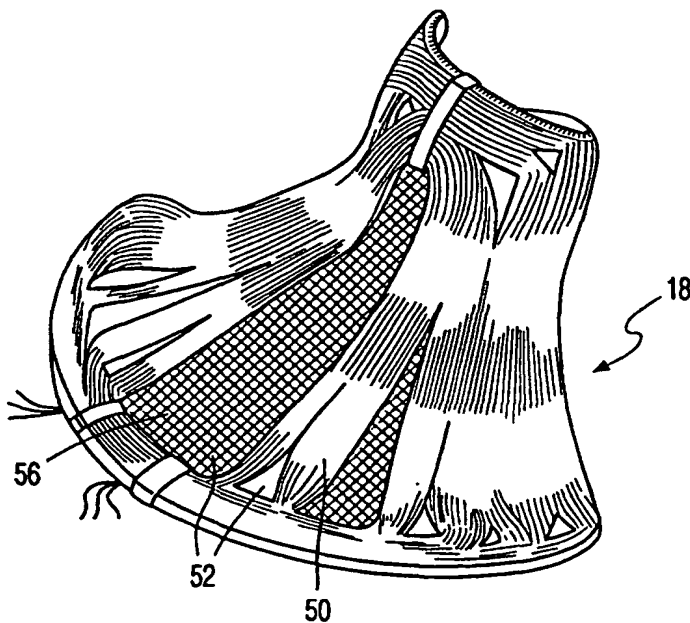

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

# INTERNATIONAL SEARCH REPORT

Inter Application No

PCT/EP 99/10406

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H01J29/76

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO=Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
------------	--	-----------------------

A	WO 98 26574 A (PHILIPS ELECTRONICS NV ;PHILIPS NORDEN AB (SE)) 18 June 1998 (1998-06-18) cited in the application the whole document	1,5,6
---	--	-------

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 August 2000

Date of mailing of the international search report

17/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Colvin, G

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP 99/10406

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9826574 A	18-06-1998	EP 0909456 A	21-04-1999
		JP 2000505936 T	16-05-2000
		US 5986396 A	16-11-1999

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
8 November 2001 (08.11.2001)

PCT

(10) International Publication Number  
**WO 01/84589 A1**

(51) International Patent Classification<sup>7</sup>: **H01J 29/70,**  
29/76

(21) International Application Number: PCT/EP01/04320

(22) International Filing Date: 13 April 2001 (13.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
00201507.1 27 April 2000 (27.04.2000) EP  
01200839.7 6 March 2001 (06.03.2001) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TUYLS, Pim, T.**  
[BE/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

**VISSENBERG, Michel, C., J., M.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **MAASSEN, Johannes, M.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **VINK, Nicolaas, G.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **SLUYTERMAN, Albertus, A., S.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **THEUWS, Wilhelmus, H., C.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **SPANJER, Tjerk, G.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: **BAELE, Ingrid, A., F., M.**; Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): CN, JP, KR, US.


(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

Published:

— with international search report

[Continued on next page]

(54) Title: DEFLECTION UNIT FOR A CATHODE RAY TUBE

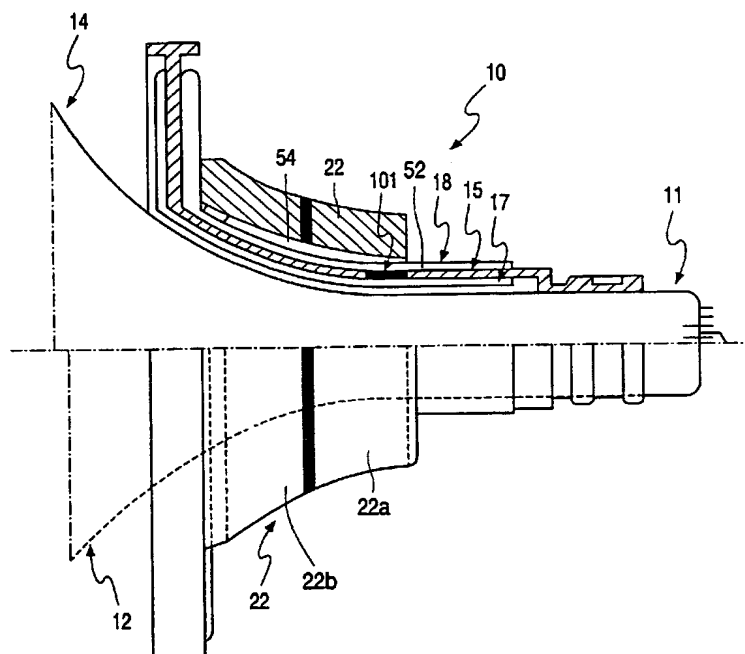

(57) Abstract: The invention relates to a deflection unit (10) for cathode ray tubes in which the energy for deflection is reduced. This is done by providing a magnetic material between frame coils (18) and line coils (17) of the deflection unit. In an advantageous embodiment of the invention, first void spaces (101) as well as second void spaces (102, 54) between the frame coils and a yoke ring and/or third void spaces (52) between wire strands of the frame coils are filled. A deflection energy reduction of up to 30 % can be obtained.

WO 01/84589 A1







---

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



## Deflection unit for a cathode ray tube

The invention relates to a deflection unit for a cathode ray tube, the deflection unit comprising line deflection coils, frame deflection coils surrounding the line deflection coils, and a yoke ring having a magnetic permeability  $\mu_r$  and surrounding the frame deflection coils.

5 The invention also relates to a cathode ray tube provided with a deflection unit, and to a display apparatus comprising such a cathode ray tube.

A deflection unit comprising frame deflection coils and line deflection coils is known from WO-A 98/26574. A deflection unit of this type is generally constructed in such a way that the two coils are mounted on a hollow support (one on the inner side and one on the outer side) and that a yoke ring surrounds these coils. The purpose of the yoke ring is to short-circuit the magnetic lines of flux outside the coils, which are generated by the frame and line coils during operation. The yoke ring thus reduces unwanted external magnetic stray fields. The yoke ring also reflects the stray fields into a deflection volume, i.e. the volume within the cathode ray tube in which the deflection of electron beams takes place. This also leads to a reduction of the power that is dissipated in the deflection coils. However, a further reduction is desired.

20 It is an object of the invention to provide a deflection unit for a cathode ray tube wherein the dissipated power for the deflection is reduced. To this end, the deflection unit according to the invention is characterized in that the deflection unit comprises a magnetic material which is present between the line deflection coils and the frame deflection coils and has a magnetic permeability  $\mu_1$  which satisfies the relation  $\mu_1 < \mu_r$ .

25 In the deflection unit according to the invention, the dissipation of the energy is reduced because the magnetic field generated by the line coils is reflected by the magnetic material into the deflection volume. However, a proper selection of the value of  $\mu_1$  is important. The inventors have realized that, only if  $\mu_1 < \mu_r$ , the magnetic field generated by the frame coils will be transmitted towards the deflection region, and a reduction of dissipated energy can be obtained. For the frame coils, the function of the magnetic material

depends on the value of the magnetic permeability  $\mu_1$  of the magnetic material within the deflection unit. If the permeability in this region is comparable to or higher than that of the yoke ring  $\mu_r$ , the magnetic material acts as a reflector. Hence, the magnetic field generated by the frame coils is reflected away from the deflection volume. This deteriorates the performance of the frame coils.

However, if the condition  $\mu_1 < \mu_r$  is satisfied, the magnetic material will act as a flux guide, which will lead to an enhancement of the magnetic field of the frame coil inside the deflection volume. Consequently, the current through the frame coils may be reduced, leading to a reduction of ohmic losses in the frame coils as well as a reduction of dissipation in the electronic drive circuits.

It is to be noted that WO-A 00/44028 describes a deflection unit in which void spaces between wire strands within the frame deflection coils and/or void spaces between the yoke ring and the frame coils are filled with magnetic material. No limitation with respect to the relative permeability of the magnetic material is required in this case.

Advantageous embodiments of the invention are defined in the dependent claims.

These and other aspects of the invention will be elucidated with reference to the embodiments described hereinafter.

In the drawings,

Fig. 1 shows schematically, partly in a cross-section, partly in a side elevation, a part of a cathode ray tube with an embodiment of the deflection unit according to the invention,

Fig. 2 is a schematic cross-section of the deflection unit according to the invention,

Fig. 3 is a graph showing the reduction of the energy dissipation in a deflection unit according to the invention,

Fig. 4 is a perspective view of a frame deflection coil according to an embodiment of the invention,

Fig. 5 shows schematically, partly in a cross-section, partly in a side elevation, a part of a cathode ray tube with a further embodiment of the deflection unit according to the invention,

Fig. 6 shows a display apparatus according to the invention,

Fig. 7 is a sectional view of a color display device,

Figs. 8A, 8B show a first and a second part of the ring-shaped element according to the invention,

Fig. 9 shows a deflection unit according to the invention,

Figs. 10A, 10B show an embodiment of the invention, and

5 Fig. 11 shows a yoke ring according to a further embodiment of the invention.

In general, like reference numerals identify like elements.

Referring to Fig. 1, the deflection unit 10 is shown mounted on the glass envelope 14 of a cathode ray tube at the region between a neck 11 and a cone portion 12 of the envelope 14. The deflection unit 10 comprises a coil support 15 of generally frusto-conical shape which carries a set of two line (horizontal) deflection coils 17 on its inner side, adjacent the envelope surface, and a set of two frame (vertical) deflection coils 18 on its outer side.

The coil support 15, together with the sets of deflection coils 17 and 18 secured thereto, forms a deflection coil assembly. A hollow yoke ring 22, in the shape of a flared annulus generally conforming with the outer contour of the coil assembly is mounted on the outer side of the assembly and fixed thereto. The yoke ring 22 surrounds the coil assembly with its front and rear ends, base, face disposed against an inner portion of the radially extending part of the coil assembly, while its rear, neck, end terminates on an intermediate part of the coil assembly.

The yoke ring 22 is a sintered moulding of soft magnetic material having a relative magnetic permeability  $\mu_r$  of typically 500. The yoke ring 22 serves to short-circuit the magnetic lines of flux outside the coils, which are generated by the frame and line coils during operation. In this way, unwanted external magnetic stray fields are reduced and the sensitivity of the line and frame deflection is increased. Although the presence of the yoke ring 22 helps to reduce these magnetic stray fields, a small external magnetic field still remains and a further reduction of this field as well as a reduction of the power dissipated in the coils is desired.

Since there is no perfect fit between the line coils 17, the coil support 15 and the frame coils 18, there are void spaces 101 between these elements. Alternatively, in order to obtain space to be filled by magnetic material, void spaces between the line and frame coils may also be created by selectively removing parts of the coil support 15; or the coil support may be even completely left out. It has been shown both experimentally as well as by

finite element simulations that a reduction of the power dissipation may be obtained if the void spaces 101 are filled with a magnetic material having a relative permeability  $\mu_1 < \mu_r$ . This is due to the additional reflection by the magnetic material of fields generated by the line coils and additional guiding by the magnetic material of the magnetic flux of the magnetic fields generated by the frame coils.

Fig. 2 is a schematic cross-section of a deflection unit according to the invention. The yoke ring 22 surrounds the frame coils 18, which surround the line coils 17. The void space 101 between the frame coils and the line coils is indicated, as well as a second void space 102 (indicated as element 54 in Fig.1) between the frame coils 18 and the yoke ring 22. Calculations as well as experiments were carried out to observe the effect of filling the void spaces 101, 102 with magnetic material. Results of these calculations are shown in Fig.3, in which the dissipation reduction DR of the deflection unit with respect to the conventional deflection unit is plotted for various values of the permeability  $\mu$  of the magnetic filling material.

Curve 61 indicates the results for the case where only void space 101 is filled. A maximal energy reduction of about 15% with respect to conventional deflection units is obtained, dependent on the value of the magnetic permeability of the filling material. For the geometry of this specific deflection unit (for a 32" CRT), using a typical value  $\mu_r = 500$  for the yoke ring, the maximum is obtained at a permeability value  $\mu_1$  of about 5. For other coil sets, the maximum might be obtained at a different permeability value. For all types of deflection units, it holds that the relation  $\mu_1 < \mu_r$  must be satisfied (as is clearly the case in the present example) because only then a reduction of energy dissipation is obtained.

There are second void spaces 102 between the yoke ring 22 and the frame deflection coils 18. Fig. 4 is a perspective view of a frame deflection coil 18 to be used in the deflection unit shown in Fig.1. The frame coil 18 comprises wire strands 50 and has third void spaces 52 between the wire strands 50. According to an advantageous embodiment of the invention, the second void spaces 102 and/or third void spaces 52 are filled with a magnetic material 56 having a magnetic permeability  $\mu_2$ . By filling the second and third void spaces, in addition to void spaces 101, a further reduction of the energy dissipation can be obtained, as is shown in Fig.3. Curve 63 represents the results for the case where both void spaces 101 and 102 are filled with the same magnetic filling material (hence  $\mu_1 = \mu_2$ ) for the same deflection unit. A total dissipation reduction of almost 30% is obtained for magnetic

permeability values of the filling material of about or larger than 10 (but smaller than  $\mu_r$ ). Experimental verifications show similar dissipation reductions.

The magnetic material used for filling the second and third void spaces may be the same material as that used for filling the first void spaces. When different magnetic materials are used, it is important that the magnetic permeabilities satisfy the relationship  $\mu_2 \geq \mu_1$ . Otherwise, a mirror effect occurs that will reflect the magnetic frame deflection field away from the deflection volume, and consequently the required deflection energy is increased instead of decreased.

Appropriate methods of filling the voids are injection moulding and insertion moulding. In injection moulding, a material is caused to flow out of a nozzle into the voids after application of a pressure to a reservoir containing the material. By subsequent heating or drying, the material is made immobile in the voids. In insertion moulding the object to be filled is surrounded by a dedicated mould, whereafter the material is introduced into the voids under a relatively high pressure. In this way, a good degree of filling the voids is obtained.

It has been found that an additional advantage of filling the DU is that the shape of the magnetic deflection field, and hence the front of screen performance (FOS), becomes much less sensitive to the shape of the inner boundary of the yoke ring. This allows the use of yoke rings with less severe constraints on deviations from roundness, which are easier / cheaper to produce.

Good results were obtained with a plastic deformable magnetic material, comprising a resinous material, which contains a filler of magnetic particles, such as plasto-ferrite. The plastic deformability of the material results in a good accommodation to the local shape of the void spaces. Typically,  $\mu_2$  and  $\mu_1$  have a value of the order of 10.

A further embodiment of the invention comprises a deflection unit 10 which further comprises a support 15 for carrying both the frame and the line coils 17, 18, which support comprises a material comprising magnetic particles. This embodiment has the advantage that no additional process steps are required for additionally filling the void spaces.

Fig. 5 shows a further advantageous embodiment of the invention, comprising a deflection unit 22 wherein the yoke ring comprises two parts, a first part 22a being positioned closer to an electron gun than a second part 22b, and wherein only the (first 101

and/or second 102 and/or third 52) void spaces surrounded by the first part of the yoke ring 22a are filled with the magnetic material. Note that the second void spaces 102 are indicated as element 54 in Fig.1. Experimentally, it was demonstrated that a significant decrease of energy dissipation of the coils could already be obtained in this case, because the deflection coils in this area have their largest contribution to the deflection. This will reduce the quantity of required magnetic material and consequently reduces the cost of the deflection unit.

Fig. 6 shows a display apparatus comprising a cathode ray tube assembly, control electronics E coupled to receive a video signal VS to apply a display signal to the cathode ray tube 14 and deflection signals to the deflection unit 10 in dependence on the video signal VS.

A further embodiment of the invention is shown in Fig. 7, wherein the shown display device comprises a color cathode ray tube having an evacuated envelope 701 which includes a display window 702, a cone portion 703 and a neck 704. The neck 704 accommodates an in-line electron gun 705 for generating three electron beams 706, 707 and 708 which extend in one plane, the in-line plane, extending in an X-direction of a rectangular X-Z coordinate system. In the undeflected state, the central electron beam 707 substantially coincides with the tube axis 709, which extends in the Z-direction. A third direction, the Y-direction, extends in a direction perpendicularly to the in-line plane (not shown in the Figure). Conventionally, during operating conditions, the tube is positioned in such a way that the X-Z plane coincides with a horizontal plane and the Y-direction coincides with a vertical direction.

The inner surface of the display window is provided with a display screen 710. The display screen 710 comprises a large number of phosphor elements luminescing in red, green and blue. On their way to the display screen, the electron beams are deflected across the display screen by way of an electromagnetic deflection unit 751 and pass through a color selection electrode 711 which is arranged in front of the display window 702 and comprises a thin plate having apertures 712. The three electron beams 706, 707 and 708 pass through the apertures 712 of the color selection electrode at a small angle relative to each other and hence each electron beam impinges only on phosphor elements of one color. In addition to a coil holder 713, the deflection unit 751 comprises deflection coils 713' for deflecting the electron beams in two mutually perpendicular directions. A ring-shaped element 721', the yoke ring, is positioned around the deflection coils 713'. The display device further includes means for



generating voltages, which during operation are fed to components of the electron gun via feedthroughs. The deflection plane 720 is schematically indicated as well as the distance  $p$  between the electron beams 706 and 708 in this plane, and the distance  $q$  between the color selection electrode and the display screen. The distance  $q$  is inversely proportional to the distance  $p$ .

The color display device comprises two electron beam convergence-influencing units 714, 714', a first unit 714 being used, in operation, to dynamically bend, i.e. as a function of the deflection in a direction, the outermost electron beams towards each other, and a second unit 714' being used to dynamically bend the outermost electron beams in opposite directions. The means 714 bends the electron beams towards each other, and the means 714' bends the electron beams in opposite directions. As a result, the distance between the electron beams is smaller for deflected electron beams than for undeflected beams. Since the distance  $p$  is smaller, the distance  $q$  may increase, which leads to an additional design freedom with respect to the curvature of the color selection electrode. The design freedom is used to increase the curvature of the color selection electrode, which has a positive effect on the strength of the color selection electrode, while the sensitivity to doming and vibration decreases.

The two units 714, 714' are positioned at some distance from each other. The first unit 714 is positioned close to the gun and will be referred to as the "gun quadrupole", whereas the second unit 714' is located near or at the deflection unit and will be referred to as the "yoke quadrupole". It is convenient to integrate the means 714' and the deflection unit 751 by winding four coils on the ring-shaped element 721', which coils generate a dynamic electromagnetic quadrupole field.

During operation, the units 714, 714' influence the deflection of the electron beams, which may lead to unwanted artifacts in the image displayed on the window 702. In conventional cathode ray tubes (CRTs), deflection in the vertical (Y-) dimension is a non-linear phenomenon, i.e. the displacement of the electron beams is a non-linear function of the current through the deflection coils. Deflection of the beams requires relatively less current at the extreme sides of the display window. Within the television set in which the tube is applied, an electronic way of correcting the non-linearity takes place, the so-called vertical S-correction. Due to the action of the yoke quadrupole, the deflection of the electron beams is a more linear process, which implies that the S-correction overcorrects the non-linear deflection phenomenon. This is undesired.

Conventional CRTs are also corrected for East-West pincushion raster distortion (East and West are indications of the two vertical sides of the display window). This means that an image consisting of a rectangular raster of horizontal and vertical lines is displayed on the screen as a distorted cushion-like shape, in which the vertical lines close to the border of the display window are bent inwards. It appears that application of the unit 714' increases this image artifact.

The influence of the unit 714' mainly arises at the side of the ring-shaped element 721' that faces the display window 702. It is preferable to split the ring-shaped element 721' into two (axially split) parts, and to wind the quadrupole coils on one of the two parts. Preferably, the quadrupole coil is wound around the core part closest to the electron gun. The measure provides the opportunity to shift the two core parts independently of each other, thus improving raster and convergence performance of the tube. Experimentally, it has been shown that the dissipated deflection energy is reduced if the void spaces are filled with magnetic material according to the invention.

Figs. 8A and 8B show a further embodiment of the invention. Fig. 8A shows a first part 760 of the ring-shaped element 721', which part is closest to the electron gun 705. The part 760 is provided with four coils 722' for generating the magnetic quadrupole field. Coils are shown that are toroidally wound around the ring-shaped element. However, this mode of winding is not essential to the invention. The quadrupole coils may also be wound around the ring-shaped element in a saddle-like shape. To facilitate the winding process and to keep the individual wire elements of the coil 722' in the right position at the first part 760, the first part is provided on its extremes with rings 764, 766 having grooves in which the coil windings are positioned. Fig. 8B shows a second part 768 of the ring-shaped element 721', which part is closest to the display window 702. When applied to the tube, the two parts 760, 768 may be connected to each other by any conventional connection means, such as glue, tape or the like. Connection of the two parts is not essential for a proper performance.

Fig. 9 shows the two parts 760, 768 according to the invention, when positioned around the deflection coils 713' and the coil holder 713. The first part 760 is provided with rings 764, 766 and four coils 722' for generating the magnetic quadrupole field.

Figs. 10A and 10B show an embodiment of the invention wherein the coils 722' around the first part 760 of the ring-shaped element 721 are obtained from electrically conductive wires, which are toroidally wound in a winding direction and in accordance with a winding density distribution  $N(\varphi)$  given by

5 
$$N(\varphi) = N_0 \cos(2\varphi);$$

where  $\varphi$  is an angle enclosed by the X-direction and a line between an element of the coil and the center, which ranges between  $0^\circ$  and  $360^\circ$ ,  $N_0$  is the winding density at  $\varphi$  equal to  $0^\circ$ , and the sign of  $N(\varphi)$  denotes the winding direction.

This embodiment has the advantage that an almost pure quadrupole field can  
10 be generated, i.e. the presence of other magnetic multiple fields is largely suppressed.

In practice, only an approximation of the above winding density can be realized due to the finite dimensions of the wire. The embodiment comprises packages 730 of electrically conductive wires, which are toroidally wound around a yoke ring 721' in accordance with the above winding density

15 
$$N(\varphi) = N_0 \cos(2\varphi).$$

In this particular embodiment, windings have been made in grooves 734 of rings 764, 766 that are spaced 15 degrees apart. The winding method is as follows:

18 windings in a groove at  $\varphi = 0$  degrees (position a),

15 windings in a groove at  $\varphi = 15$  degrees (position b),

20 9 windings at  $\varphi = 30$  degrees (position c),

no windings at  $\varphi = 45$  degrees (position d),

9 windings with current in an opposing direction in a groove at  $\varphi = 60$  degrees (position e),

15 windings at  $\varphi = 75$  degrees (position f),

18 windings at  $\varphi = 90$  degrees (position g), etc. Practice has proved that this approximation

25 of the ideal winding density  $N(\varphi)$  gives good results.

A further embodiment of the invention is shown in Fig. 11, wherein a yoke ring is shown which further comprises a third part 22c, positioned closer to the neck portion 11 of the cathode ray tube than the first part 22a and where only the void spaces surrounded by the  
30 first part of the yoke ring 22a are filled with the magnetic material. This has the advantage that the deflection energy is simultaneously reduced by filling the void spaces surrounded by the first part 22a, whereas, by not filling the void spaces surrounded by the second part 22b

and the third part 22c, so-called asymmetry errors can be corrected by shifting and/or tilting these parts of the yoke ring.

A disadvantage of filling the deflection unit completely is that asymmetry errors in the generated magnetic field can no longer be corrected by shifting and/or tilting the yoke ring. This can be partly solved by using a yoke ring split into two parts, of which only the neck side is filled and the screen ring is used for matching, which is the process by which asymmetry errors are reduced by shifting and/or tilting the yoke ring. This may have the drawback that the so-called pullback, i.e. the minimal distance between the inner glass contour and the outermost electron beam becomes too small. This can be corrected by optimization of the coils, but is at the expense of an increase of energy dissipation. Consequently, a part of the advantage of the dissipation reduction is lost. This can be understood as follows. Filling the two-part yoke ring only at the neck side enhances the magnetic field at that position more than at the screen side. This means that the deflection point will shift towards the neck part of the deflection unit, because the deflection starts at an earlier instant. In order to shift the deflection point back towards the original position, one has to generate an extra magnetic field at the screen side, which requires additional magnetic energy. A straightforward method of achieving a maximal dissipation gain with a minimal pull-back reduction is to fill the whole length of the yoke ring. However, in that case asymmetry errors must be corrected electronically by means of an additional correction coil, which is undesired.

It is therefore proposed to split the yoke ring into three parts 22a, 22b, 22c as is shown in Fig.11. Only the first (middle) part 22a is filled with the magnetic material. The other two ring parts 22b, 22c can be used for matching, both at the neck side (third part 22c) and the screen side (second part 22b). By not filling the third part 22c, the field is not enhanced in this region. This would lead to a smaller dissipation gain. However, this is compensated by filling the middle ring 22a also beyond the deflection point (i.e. by using a smaller screen ring than in the case of a single split yoke ring). Furthermore, the neckward shift of the deflection point is reduced by not filling the neck ring.

In summary, the invention relates to a deflection unit 10 for cathode ray tubes in which energy for deflection is reduced. This is done by providing magnetic material 56 between frame coils 18 and line coils 17 of the deflection unit. In an advantageous embodiment of the invention, first void spaces 101 as well as second void spaces 102, 54

between the frame coils and a yoke ring and/or third void spaces 52 between wire strands of the frame coils are filled. A deflection energy reduction of up to 30% can be obtained.

It should be noted that the above-mentioned embodiments illustrate rather than  
5 limit the invention, and that those skilled in the art will be able to design many alternative  
embodiments without departing from the scope of the appended claims. In the claims, any  
reference signs placed between parentheses shall not be construed as limiting the claim. Use  
of the verb "to comprise" and its conjugations does not exclude the presence of elements or  
steps other than those stated in a claim. Use of the article "a" or "an" preceding an element  
10 does not exclude the presence of a plurality of such elements.

## CLAIMS:

1. A deflection unit (10) for a cathode ray tube (14), the deflection unit (10) comprising:

line deflection coils (17),

frame deflection coils (18) surrounding the line deflection coils (17), and

5 a yoke ring (22) having a magnetic permeability  $\mu_r$  and surrounding the frame deflection coils (18), wherein

the deflection unit (10) comprises a magnetic material which is present between the line deflection coils (17) and the frame deflection coils (18) and has a magnetic permeability  $\mu_1$  which satisfies the relation  $\mu_1 < \mu_r$ .

10

2. A deflection unit (10) as claimed in claim 1, wherein void spaces (101) are present between the line deflection coils (17) and the frame deflection coils (18), and the void spaces (101) are filled with the magnetic material.

15

3. A deflection unit (10) as claimed in claim 2, wherein second void spaces (54,102) are present between the frame deflection coils (18) and the yoke ring (22), and third void spaces (52) are present between wire strands (50) of the frame deflection coils (18), and the second and/or third void spaces are filled with a magnetic material (56) having a magnetic permeability  $\mu_2$  which satisfies the relationship  $\mu_2 \geq \mu_1$ .

20

4. A deflection unit (10) as claimed in claim 3, wherein the yoke ring comprises at least two parts, a first part (22a) being positioned closer to a neck portion (11) of the cathode ray tube than a second part (22b), and wherein only the void spaces surrounded by the first part of the yoke ring (22a) are filled with the magnetic material.

25

5. A deflection unit (10) as claimed in claim 1, wherein the deflection unit (10) further comprises a support for carrying both the frame and the line coils, said support comprising the magnetic material.

6. A deflection unit (751) as claimed in claim 4, wherein the first (760) and/or the second (768) part have four coils (722') for generating a magnetic quadrupole field.

7. A deflection unit (751) as claimed in claim 6, wherein said coils (722')  
5 comprise electrically conductive wires which are toroidally wound in a winding direction and in accordance with a winding density distribution  $N(\varphi)$  given by  $N(\varphi) = N_0 \cos(2\varphi)$ ; where  $\varphi$  is an angle enclosed by an X-direction and a line between an element of the coil and the center, which ranges between  $0^\circ$  and  $360^\circ$ ,  $N_0$  is the winding density at  $\varphi$  equal to  $0^\circ$ , and the sign of  $N(\varphi)$  denotes the winding direction.

10

8. A deflection unit as claimed in claim 4, wherein the yoke ring further comprises a third part (22c) which is positioned closer to the neck portion (11) of the cathode ray tube than the first part (22a)

15

9. A cathode ray tube assembly (10, 14) comprising a deflection unit (10) as claimed in claim 1.

10. A display apparatus, comprising:

a cathode ray tube assembly as claimed in claim 9,

20

control electronics (E) coupled to receive a video signal (VS) to apply a display signal to the cathode ray tube (14) and deflection signals to the deflection unit (10) in dependence on the video signal (VS).





FIG. 2

JC13 Rec'd PCT/PTO 26 DEC 2001

2/7

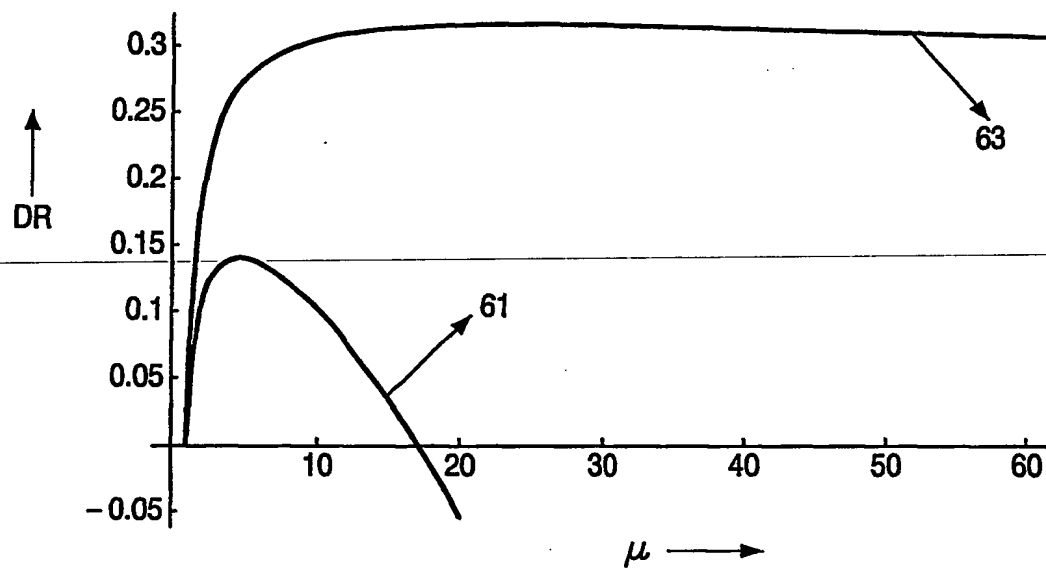


FIG. 3

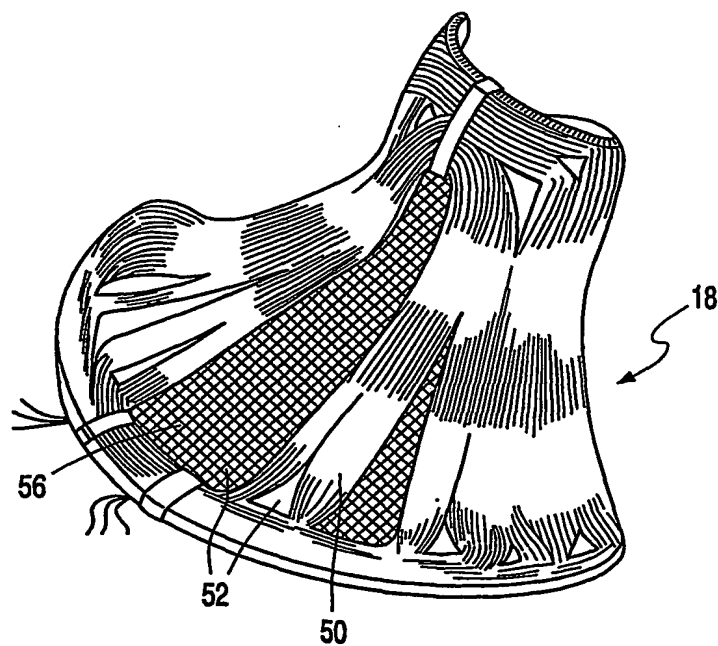


FIG. 4



3/7

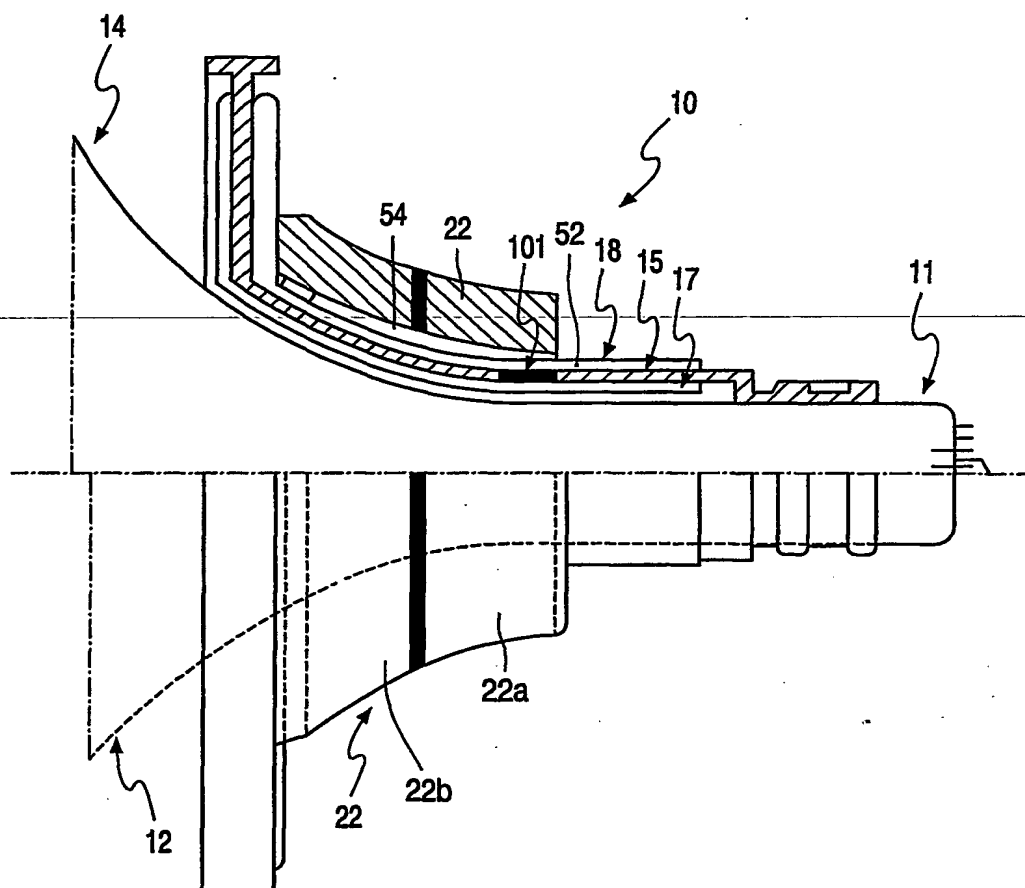


FIG. 5

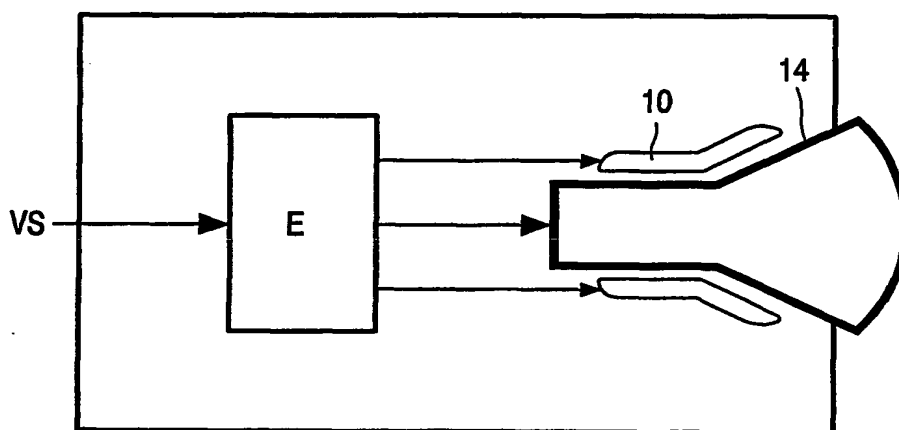


FIG. 6



4/7

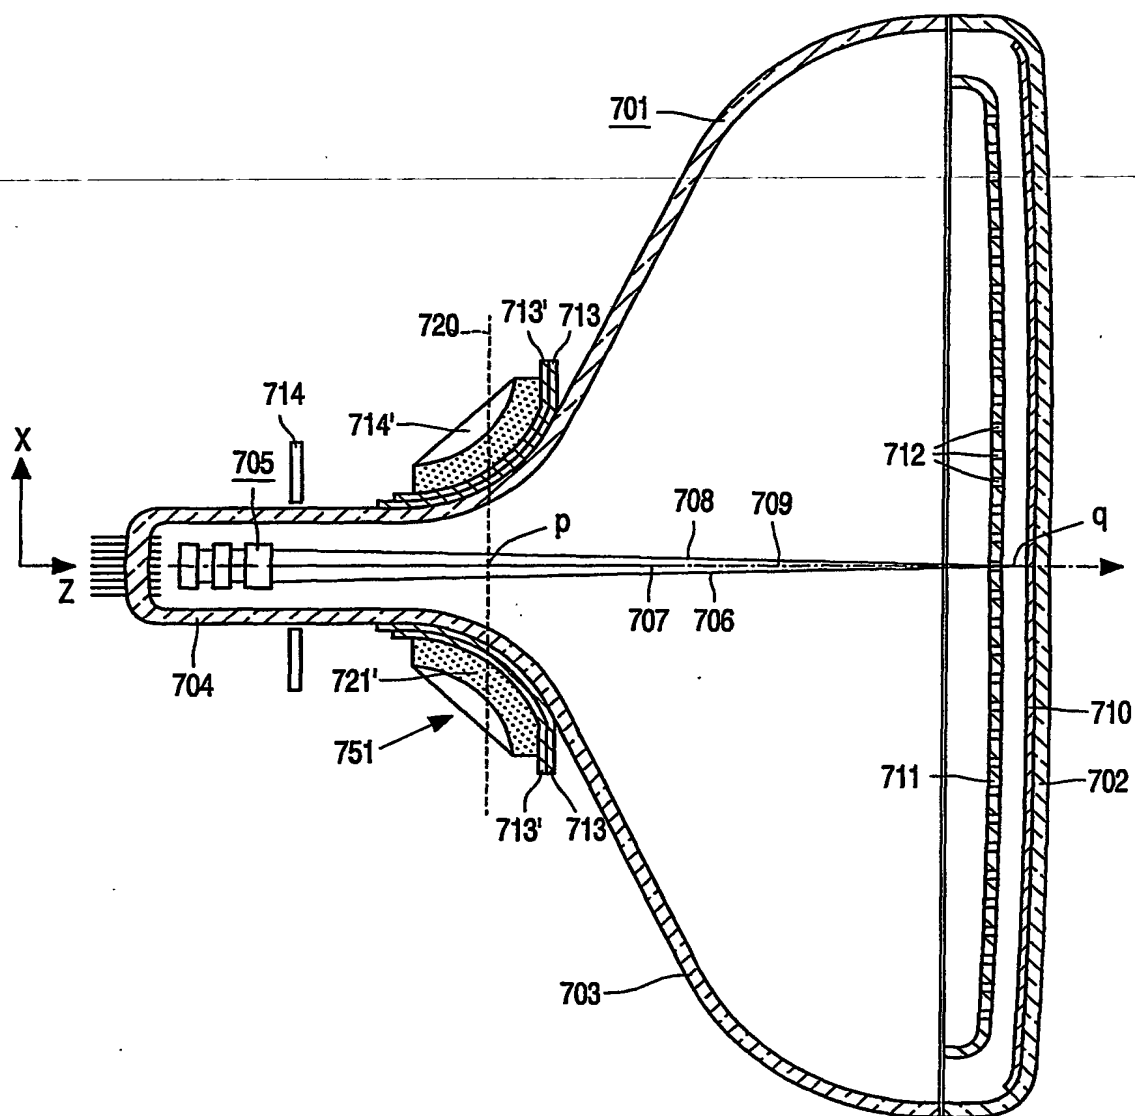


FIG. 7

JOIS Rec'd PCT/PTO 26 DEC 2001

" " "



5/7

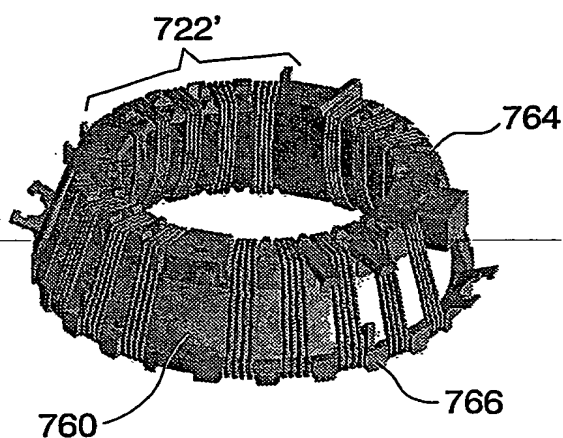


FIG. 8A

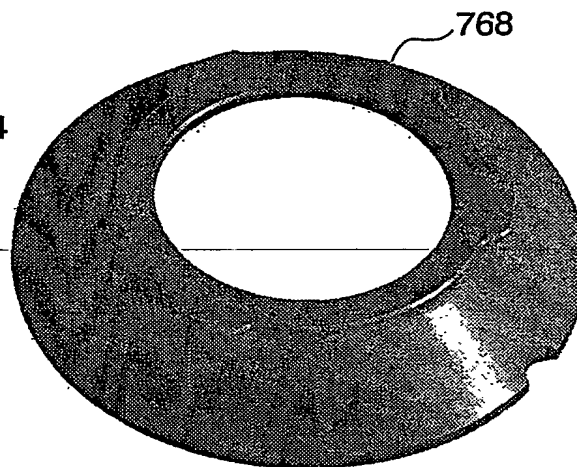


FIG. 8B

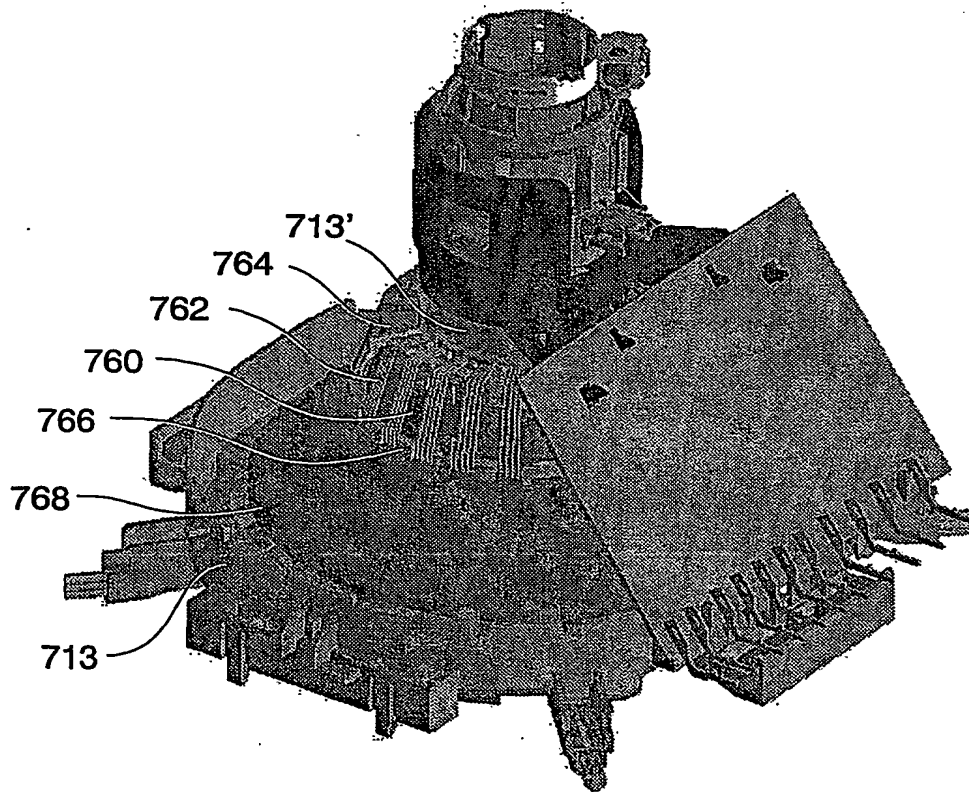


FIG. 9

JC13 Rec'd PCT/PTO 26 DEC 2001

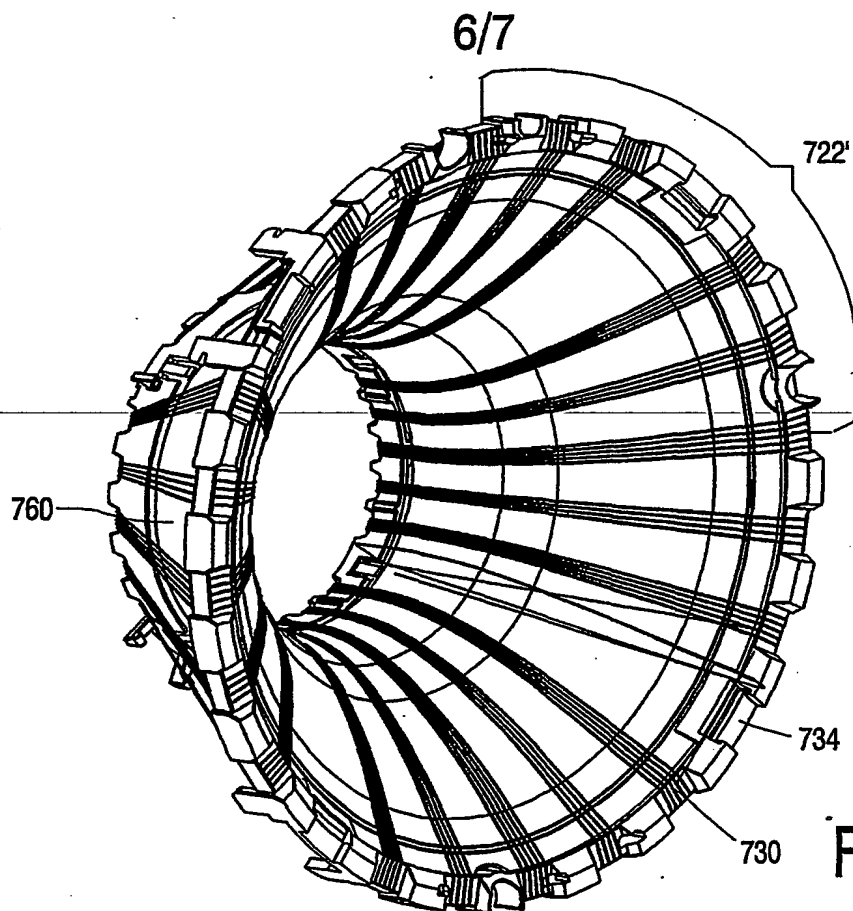


FIG. 10A

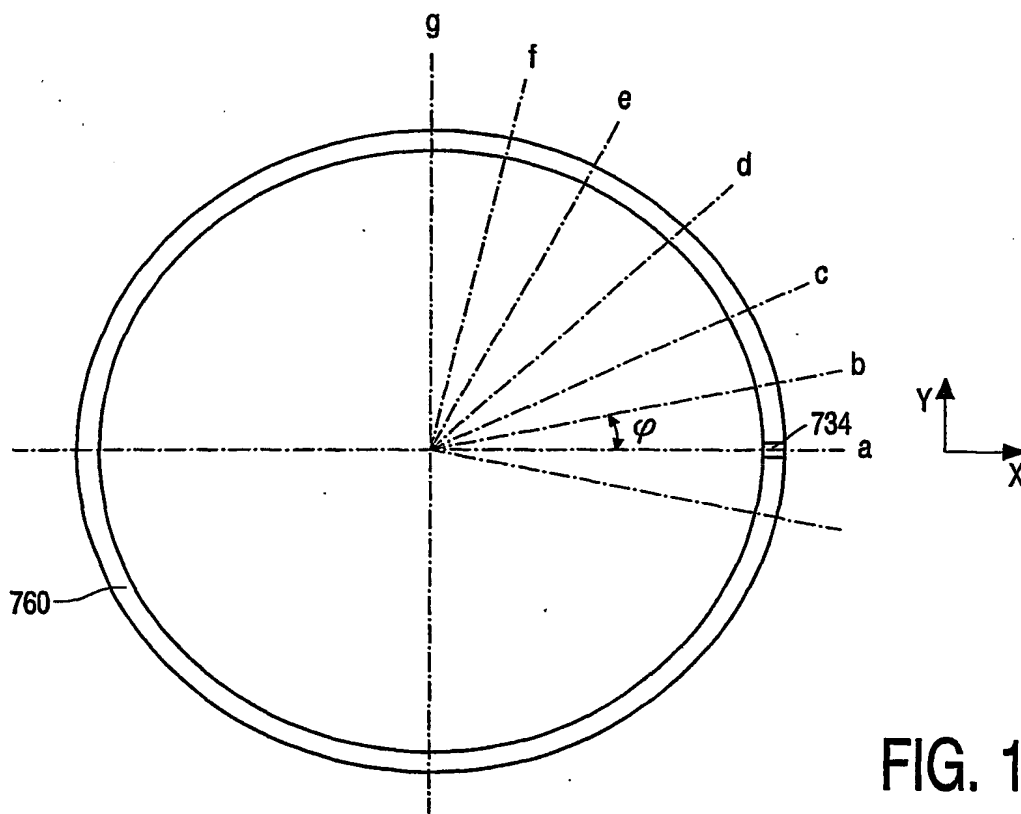


FIG. 10B

JC13 Rec'd PCT/PTG 26 DEC 2001

7/7

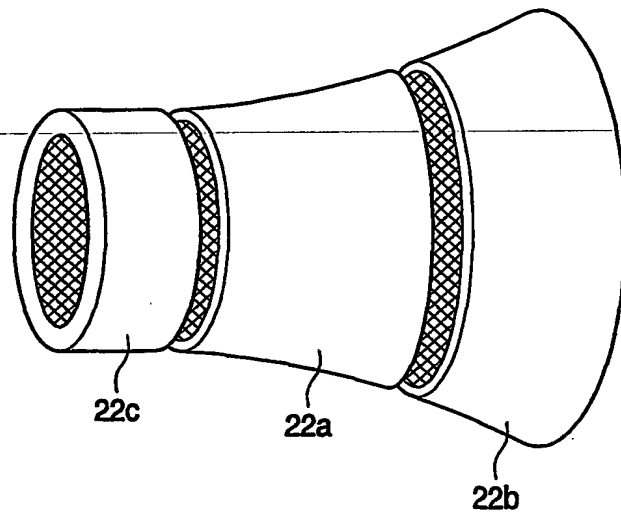


FIG. 11



## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 01/04320

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H01J29/70 H01J29/76

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, WPI Data, EPO-Internal, INSPEC, IBM-TDB

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	WO 00 44028 A (KONINKL PHILIPS ELECTRONICS NV) 27 July 2000 (2000-07-27) cited in the application claims 1-5	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*G\* document member of the same patent family

Date of the actual completion of the international search

27 August 2001

Date of mailing of the international search report

31/08/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Van den Bulcke, E

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/EP 01/04320

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0044028 A	27-07-2000	EP 1066645 A	10-01-2001